


SharXS attack! Taking every audience by storm!

The new Maxi SharXS®HTI® with an extra dose of power.





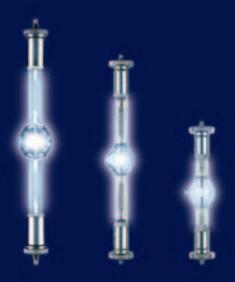

The super light for superstars.

Maxi SharXS®HTI® 2000 W/D10/60: higher wattage, proven modular concept.

A large family with a real bite: OSRAM SharXS®HTI®.

Thanks to their modular design, all the members of the SharXS®HTI® family are masters of creative light.

More light, more excitement: the new Maxi SharXS®HTI®.

The Maxi SharXS®HTI® 2000 W/D10/60 is a compact double-ended metal halide lamp – the first member of the new high-power Maxi SharXS® series with 2,000 W. Due to its extra-short arc of 10 mm, this lamp has a very high luminance and provides a high output for intelligent entertainment lighting. Its eXtreme Seal technology enables higher pinch temperatures of up to 450 °C max. Being double-ended (with a pre-focus base), the lamp is suitable for hot restart.

Greater efficiency: short-arc technology.

The SharXS®HTI® family uses state-of-the-art HTI® technology to achieve a particularly high luminous efficacy. The arc in these innovative light sources has been reduced to 3–10 mm. What this means for you is that the SharXS® produces

a higher luminance from the same wattage and therefore saves electricity and reduces your operating costs.

Capable thermal loading: eXtreme-Seal technology.

A special coating is the key. The maximum pinch temperature has been increased from 350 °C to 450 °C. Because they can withstand greater thermal loads, SharXS® lamps need less cooling and are therefore quieter in operation. Thanks to the higher thermal load capacity of SharXS® lamps, less cooling is required so the luminaires are quieter in operation.

Modular design: the same dimensions for all wattages within each SharXS® family.

For luminaire manufacturers, the compact modular design means a shorter time to market and lower costs.



The Dutch singer Anouk live in concert, 28.3.2008. Gert Hof was responsible for the Stage & Light design and the lighting equipment was provided by A&O Technology.



SharXS®, Maxi SharXS® and Baby SharXS® stay cool – thanks to eXtreme-Seal technology.

SharXS®HTI® in its element.

SharXS® lamps are at home in all areas of entertainment lighting:

- Shows and events
- Clubs und discotheques
- Concert halls
- TV studios
- Advertising and retail

They are ideal for intelligent luminaires:


- Moving heads
- Scanners
- Projectors
- Color changers

Successful for the past 30 years.

Double-ended lamps have enjoyed great success on the entertainment market for many years. They really play to their strengths:

- Less sensitive to heat
- Always ready for a hot restart
- Allow more compact luminaire design
- Pre-focus base for accurate lamp installation
- Double-ended lamp will allow for key-lock socket feature

Let your creativity loose. Catch the complete SharXS®HTI® family at your OSRAM dealer or at www.sharxs.com

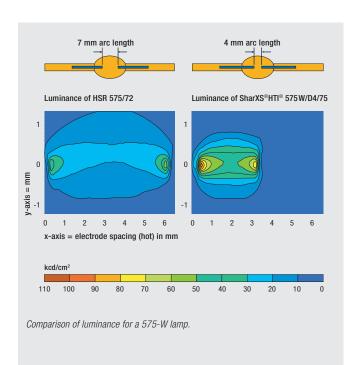





Rock steady in 93, 136 and 220 mm: SharXS®HTI®.





The new Maxi SharXS® is here.

- More power thanks to higher wattage.
- Short 10-mm arc for greater efficiency.
- eXtreme Seal (XS) technology for improved thermal loading.
- Modular design with overall length of 220 mm.









Product reference	Rated wattage W	Lamp volt- age V	Operating current A	Lumi- nous flux lm	Color temp. K	Length max. I	Dia- meter d max.	LCL a	Average lamp life	Base*	NAED code
Baby SharXS®											
SharXS HTI 250 W/D5/80	250	95	3.2	18000	8000	93	16	35 + 1 mm	3000	SFc10-4	54297
SharXS HTI 300 W/D5/57	300	80	4.3	20000	5700	93	16	35 + 1 mm	3000	SFc10-4	54298
SharXS HTI 300 W/D5/65	300	80	4.3	22000	6500	93	16	35 + 1 mm	750	SFc10-4	54299
SharXS HTI 400 W/D5/60	400	95	4.2	33000	6000	93	18	35 + 1 mm	750	SFc10-4	54300
SharXS HTI 575 W/D5/56	575	95	7.0	43000	5600	93	18	35 + 1 mm	500	SFc10-4	54359
SharXS HTI 575 W/D5/75	575	95	7.0	43000	7500	93	18	35 + 1 mm	750	SFc10-4	54358
SharXS® SharXS HTI 200 W/D3/70	200	60	3.3	13000	7000	136	15	57.5 + 1 mm	3000	SFc10-4	54279
SharXS HTI 400 W/D3/75	400	49	8.5	26000	7500	136	18	57.5 + 1 mm	1000	SFc10-4	54241
SharXS HTI 575 W/D4/60	575	69	8.3	49000	6000	136	20	57.5 + 1 mm	750	SFc10-4	54296
SharXS HTI 575 W/D4/75	575	64	9.0	44000	7500	136	20.5	57.5 + 1 mm	750	SFc10-4	54270
SharXS HTI 700 W/D4/60	700	70	10.0	59000	6000	136	20	57.5 + 1 mm	750	SFc10-4	54282
SharXS HTI 700 W/D4/75	700	70	10.0	59000	7500	136	20.5	57.5 + 1 mm	750	SFc10-4	54242
SharXS HTI 1200 W/D7/60	1200	95	12.7	110000	6000	136	21	57.5 + 1 mm	750	SFc10-4	54268
SharXS HTI 1200 W/D7/75	1200	95	12.7	110000	7500	136	21	57.5 + 1 mm	750	SFc10-4	54269
SharXS HTI 1500 W/D7/60	1500	110	13.6	165000	6000	136	25	57.5 + 1 mm	750	SFc10-4	54319
Maxi SharXS® SharXS HTI 2000 W/D10/60	2000	105	19.0	200000	6000	220	28	90 + 1 mm	750	SFc15.5	54328
SharXS®HTI® Family Product Name	1500 W Wattage = 15		/ D7 D = Double	/ (60 Color temper		20	30 + 1 IIIII	700	01010.0	04020

 $60 = 6000 \, \text{K}$

OSRAM GmbH

Head Office

Hellabrunner Str. 1 81543 Munich

Phone +49 (0) 89-62 13-0 +49 (0) 89-62 13-20 20 Fax

* Lampholders for SFc10-4 also available.

www.osram.de www.osram.com catalog.myosram.com/DE catalog.myosram.com/EN

OSRAM GmbH

Display/Optic Division

Nonnendammallee 44 13629 Berlin

Phone +49 (0) 30-33 86-21 74 Fax +49 (0) 30-33 86-23 59

7 = Arc gap in mm

OSRAM U.S./NAFTA

Display/Optic Division

100 Endicott Street Danvers, MA 01923

Phone 888-667-26 27 Fax 800-762-71 92



