

Part number

PEW 12565 SV



Brief description:

hoods, plugs, 3 poles + N + PE, 125 (A.C.), 346 ÷ 415V, 6 red, straight, IP67

Product description	
Model	plugs
Version	PLUSO, plugs and socket-outlets
Series	PEW...SV
Product type	coupler
Style	straight
Family	plugs and socket-outlets
N. of poles	3 poles + N + 
Clock position	6
Technical data	
Current	125 A
Voltage	200/346 ÷ 240/415 V
Frequency	50 and 60 Hz.
Operating temperature range (min, max)	-40°C ... +125°C
Material	thermoplastic
IP degree of protection	IP67
Further technical details	
Weight	1.785,00 g

Approvals / Standards	
Reference standard	EN 60309-1 and -2
Quality mark	
General ordering information	
EAN13 code	8015747070669
Packaging Information	
Packaging length	330,00 mm
Packaging height	170,00 mm
Packaging width	230,00 mm
Packaging weight	3,87 kg
Packaging volume	12,90 dm ³
Packaging description	Carton box
Packaging quantity	2 Pcs
Packaging EAN code	8015747192835
Sub-packaging weight	1,94 kg
Sub-packaging description	Plastic packaging
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747070683


Part number

PEW 12565 SV



Catalogue drawings

(63 / 125A) PEW ... SV

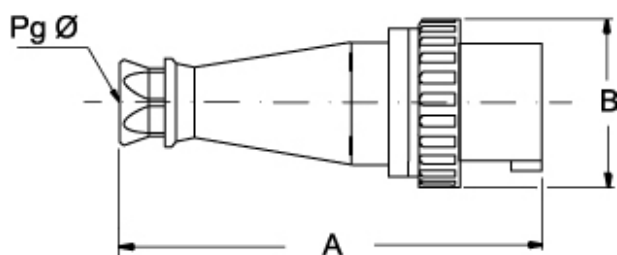

PEW ... SV	A	B	Pg Ø
63A 2P+⊕	264,5	112	36
3P+⊕	264,5	112	36
3P+N+⊕	264,5	112	36
125A 2P+⊕	310	130	2" gas
3P+⊕	310	130	2" gas
3P+N+⊕	310	130	2" gas

Notes

- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PE...SV types 16A and 32A (IP44), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure
- PEW...SV types 16A and 32A (IP66/IP67), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure, locking ring with gasket colour coded according to operating voltage
- PEW...SV types 63A and 125A (IP67), entry with cable gland, RAL 7035 grey enclosure, locking ring with gasket colour coded according to operating voltage
- PEW...SV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- SIP version with phase inverter (3P+N+E, h6), 16A and 32A
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and 32A only version PHW...SV)