



Architectural MSA

MSA 2500 DE UNP

Architectural MSA – double ended night colors The high luminous efficacy and optimal lamp filling of the double ended Architectural MSA lamps create high beam intensity and excellent color rendering. While the compact arc of the lamp allows efficient beam control and high intensity. Ideal to illuminate architecture of all types at night.

Product data

• Product Data

Order code	202086 00
Full product code	871150020208600
Full product name	MSA 2500 DE UNP
Order product name	MSA 2500 DE UNP/1
Pieces per pack	1
Packing configuration	1
Packs per outerbox	1
Bar code on pack - EAN1	8711500202086
Bar code on outerbox - EAN3	8711500202086
Logistic code(s) - 12NC	928099405103
Net weight per piece	0.247 kg

• General Characteristics

System Description	Double Ended
Cap-Base	(P)SFC
Burning Position	p15
Main Application	Architectural
Life to 50% failures EM	2500 hr

• Electrical Characteristics

Rated Lamp Wattage	2500 W
Technical Lamp Power	2500 W
Lamp Current	22.5 A

Ignition Supply Voltage	198 V
Dimmable	no

• Light Technical Characteristics

Colour Code	856
Colour Rendering Index	90 Ra8
Colour Temperature	5600 K
Colour Temperature Technical	5600 K
Chromaticity Coordinate X	330 -
Chromaticity Coordinate Y	360 -
Lamp Luminous Flux EM	250000 Lm
Lamp Luminous Efficacy EM	100 Lm/W

• Product Dimensions

Overall Length C	364 mm
Diameter D	41 mm
Arc Length O	25 mm


• Luminaire Design Requirements

Pinch Temperature	300 C
Bulb Temperature	980 C

PHILIPS


sense and simplicity

Dimensional drawing




MSA 2500 DE

Product	C (Max)	D (Max)	L (Max)	O (Norm)
MSA 2500 DE	364	41	-	25



Photometric data

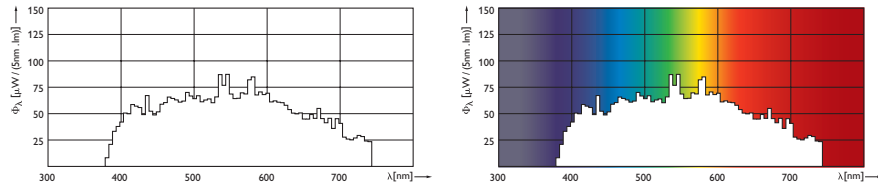

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, March 15
data subject to change