

Edition: 05/06 - subject to change

Supersedes: /
Status: valid


64788 (230/240V)

■ Product description

The OSRAM 64788 is mainly used for studio and theatre lighting as well as film production. This is a popular lamp and widely fitted into Frensel, Profile, PC Spot and Follow Spot luminaires.

■ Technical Data

| | | |
|-----------------------------|----------|----------|
| Lamp / order reference | 64788 | |
| ANSI | FTM | |
| LIF | CP/72 | |
| Rated lamp wattage | W | 2000 |
| Rated lamp voltage | V | 230/240 |
| Average life-time | h | 400 |
| Color temperature | K | 3200 |
| Luminous flux | lm | 52000 |
| Luminous efficiency | Lm/ W | 25.40 |
| Base | GY16 | |
| Diameter d | mm | 34 ± 1 |
| Lamp length L | mm | 145 max. |
| LCL a | mm | 70 ± 2 |
| Filament dimensions (w x h) | mm | 20 x 19 |
| Type of coil | biplan | |

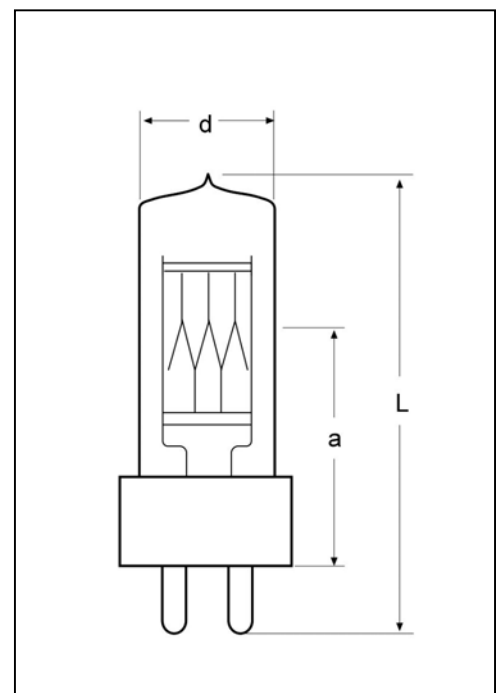

■ Lamp operation

| | | |
|-----------------------------|-----------|------------|
| Max. pinch seal temperature | °C | 350°C max. |
| Burning position | s90 | |
| Fuse protection | 10A quick | |