


# STAGE DECK DOLLY 1 AND 2 METER

## ASSEMBLY INSTRUCTIONS

### ASSEMBLY


### STEP 1

Assemble the omega stagedex plates on to the length profiles with the M6x16 bolts and M6 nuts nylock.

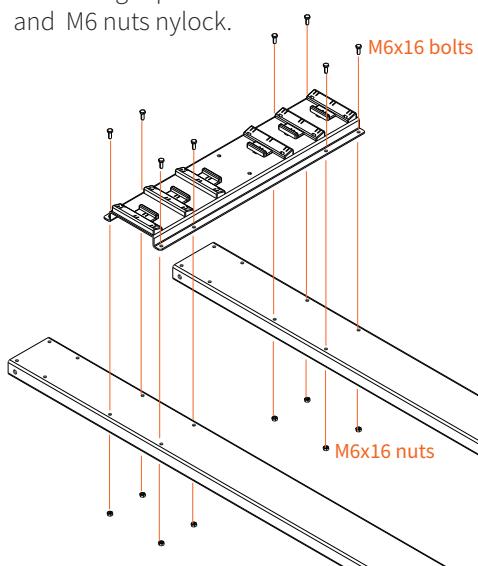

### STEP 2


Now mount the side panels onto the Length profiles with the M6x16 bolts and M6 nuts nylock.

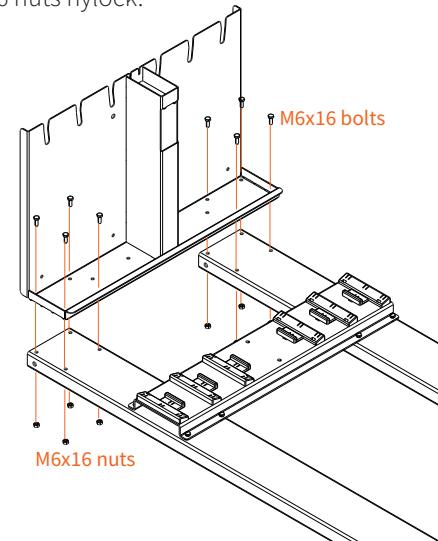

### LOADING

#### STEP 1

Load the decks from the inside out.



#### STEP 2

Lock your deck in the last slots with the bolts.




#### STEP 3

Use straps to secure the load.

### WARNING

Never load higher than 1 m to prevent instability.


Always keep the transporter on a flat surface

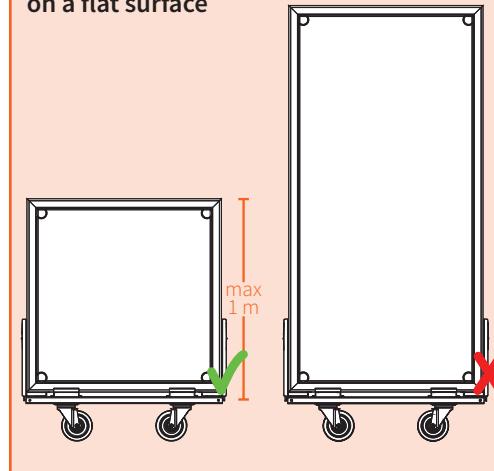

### ASSEMBLY


### STEP 1

Assemble the omega stagedex plates on to the length profiles with the M6x16 bolts and M6 nuts nylock.

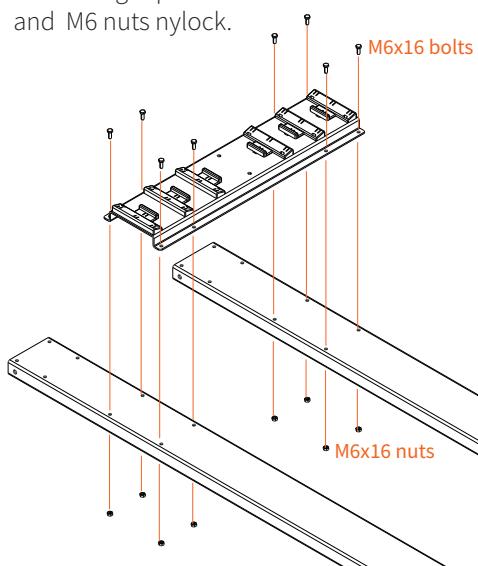


### STEP 2

Now mount the side panels onto the Length profiles with the M6x16 bolts and M6 nuts nylock.

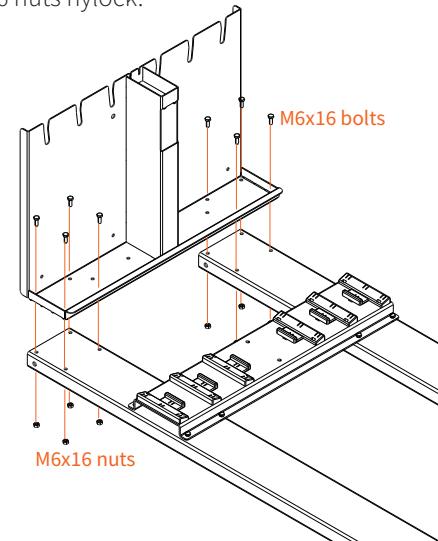

### STEP 3

Assemble the wheels on the underside of the length profiles with the M8x16 bolts and M8 nuts nylock.

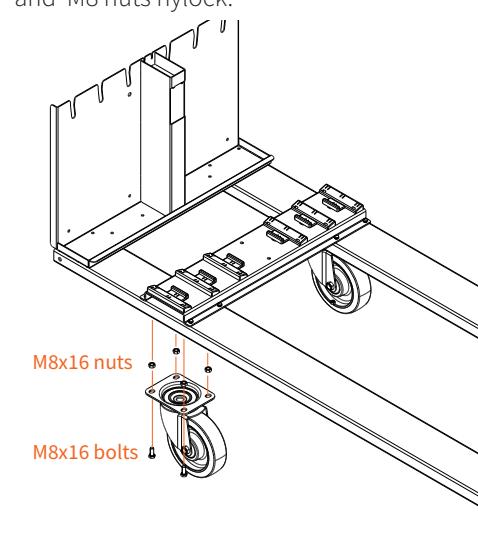

### MAINTENANCE

The Stage deck transporter hardly needs any maintenance under normal use and environmental circumstances. For safety reasons however, all parts must be checked regularly for dirt, damages, loss and corrosion.

- Check all components for damage and corrosion. Damaged and corroded parts shall be rejected and thrown away.

Replaced component shall be genuine Admiral only.