



Simple GBS 10-port Gigabit Switch USER MANUAL

TMB 24/7 Technical Support

US/Canada: +1 818.794.1286

Toll Free: 1 877.862.3833 (877.TMB.DUDE)

UK: +44 (0)20.8574.9739

Toll Free: 0800.652.5418


e-mail: techsupport@tmb.com

PRODUCT OVERVIEW

ProPlex GBS Gigabit Ethernet switches are designed for portable entertainment production and are part of the ProPlex Data Distribution range of products for complete touring show data management. The rugged ProPlex SGBS is suitable for high-volume, multicast, video, audio, or lighting data.

Features include:

- Reconfigurable! Panel for ports 9 and 10 on the back of the Unit can be changed. Based on the configuration, available with 8+2 Gigabit Ethernet tour-grade ports or 8 Gigabit Ethernet +1 OpticalCON QUAD heavy-duty port where both optical pairs are used.
- Built for extreme conditions. Shock-mounted circuitry.
- Onboard OLED interface simplifies management with a variety of pre-set VLAN configurations and managed switch options.
- Compatible with a wide range of entertainment-specific protocols, including sACN, ArtNet, CobraNet, Dante, ETCNet, Ethersound, MA-Net, and more!

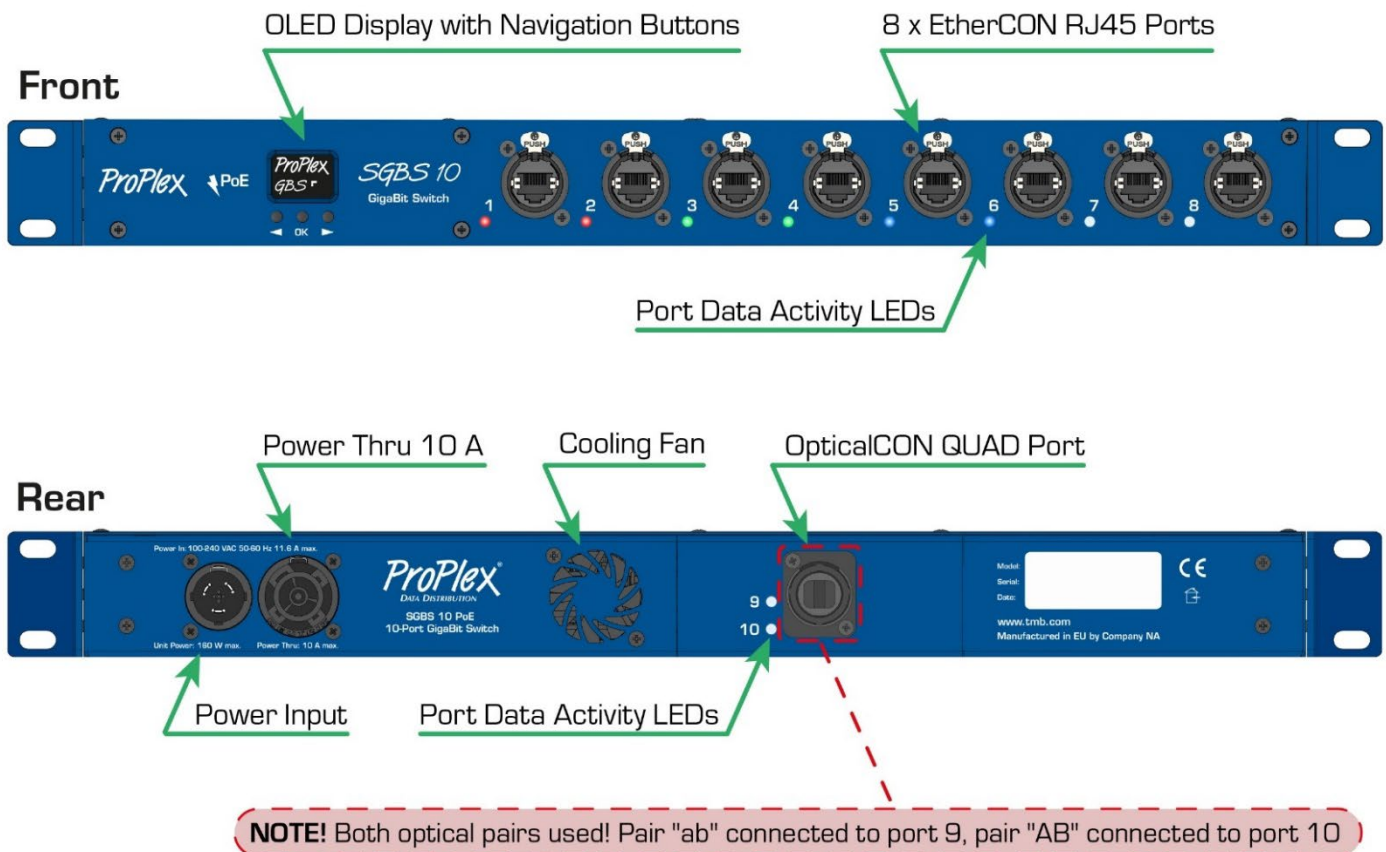

Panel for ports 9 and 10 is changeable, also available in configuration with 2 EtherCon RJ45 Ports.

OPERATION CONTROL


PANEL NAVIGATION

The LCD Control Panel has built-in navigation buttons and OLED screen to show the current mode selection and display other menu functions. Easy mode selections are available through the LCD Control Panel, giving a variety of VLAN configurations alongside common managed switch settings enabling RSTP and IGMP. Various menus are navigated with the LEFT and RIGHT button, and are accessed by the OK button.

BOOT SCREEN - The device will show a Boot Screen when powering on the first time. The boot process can last for up to one minute.




OLED SCREEN - The OLED screen will always show the current operating mode and description

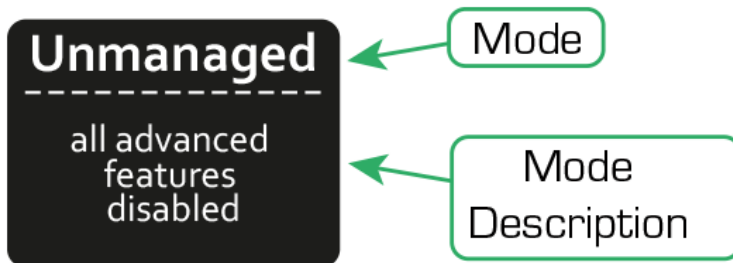

LEFT and RIGHT - Navigates and scrolls through the various internal menu structure. Current highlighted menu options are indicated on screen and are accompanied by port LED activity.

OK - Allows mode selection and loading once highlighted

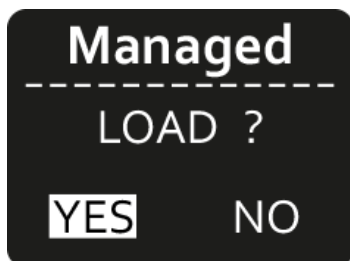


MENU MAP

Unmanaged	All settings are off, no VLAN groups
Managed	RSTP ON IGMP ON QoS ON
DHCP + Managed	RSTP ON IGMP ON QoS ON DHCP ON
2 groups/VLANs + Managed	RSTP ON IGMP ON QoS ON 2 group VLAN
3 groups/VLANs + Managed	RSTP ON IGMP ON QoS ON 3 group VLAN
Custom/Unknown*	Other configuration different than default modes

LED INDICATORS

Front

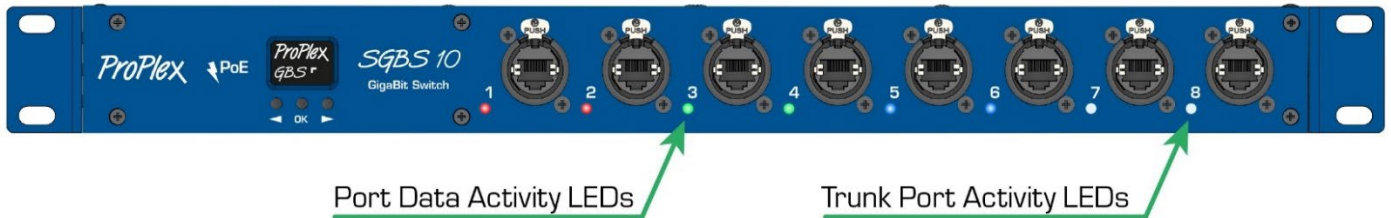

Rear



Trunk Port Activity LEDs

Trunk ports are always set as trunks in every mode selection. When connected to a network, Trunk Port Activity LEDs will show connection speed.

- Blinking Green: 1 Gbps
- Blinking Orange: 100 Mbps

Port Data Activity LEDs

On bootup, the Port Data Activity LEDs will glow white in a wave pattern. When boot is complete, Port Data Activity LEDs will change color depending on the current mode selection.

When mode selection is initiated, each VLAN grouping will change its Port Data Activity LED to the representative VLAN color. The groups will also identify visually by white flashing (1-3 times depending on VLAN number) which will cascade through each group consecutively.


-  **VLAN 11**
-  **VLAN 12**
-  **VLAN 13**

Unmanaged, Managed, and Managed + DHCP modes are represented by White LEDs

DEFAULT VLAN GROUP CONFIGURATION


2 VLAN Groups

(Default panel configuration)

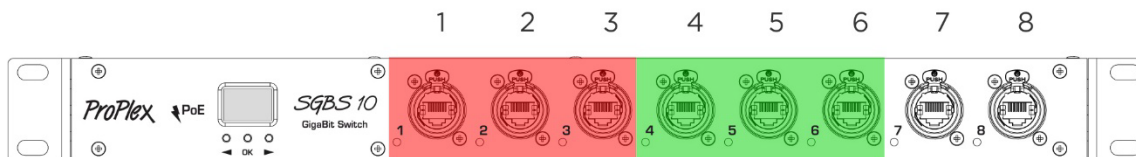

3 VLAN Groups

(Default panel configuration)

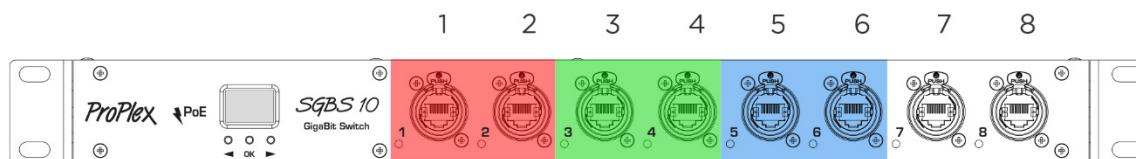

- VLAN 11
- VLAN 12
- VLAN 13

Login credentials

Login (username / password):

Cisco1234 / ProPlex1234 (usually this one will be active login)

ProPlex1234 / Cisco1234 (can be used if default fails)

SPECIFICATIONS

	PoE	Non PoE
PoE Support	YES (802.3at PoE+, 802.3af, and Cisco prestandard (legacy) PoE)	NO
	8 Ports Support PoE	
Ethernet Ports	8 Neutrik EtherCon RJ45 (2 Trunk)	
Optional Ethernet Ports	2 Neutrik EtherCon RJ45 (Trunk)	
Optional Fibre Ports	1 Neutrik OpticalCon QUAD (Trunk)	
Ethernet Type	Gigabit	
Switching Capacity	20.0 Gigabits per second (Gbps)	
Packet Buffer Memory	1.5 Mb	
Forwarding Rate	41.66 million Packets per Second (mpps) (64-byte packets)	
Power Input	100-240 VAC, 50-60 Hz	
Power Consumption max.	160W	20W
Power Connector	Neutrik PowerCon True1 IN/THRU	
Cooling	Active	
Unit Dimensions (WxHxD)	19 x 1.72 x 14.29 in (482,6 x 43,7 x 363 mm)	
Weight	13.66 lb (6.2 kg)	

DIMENSIONS

